

Specifications

622g

Payload weight (Incl. battery)

10 x 7 x 5 cm

Minimum payload dimensions

3 hrs

Maximum endurance

100km

Maximum comms range



Compliance

DO 178C (DAL-B)

software compliant

MOC 2511 compliant

MOC 2512 compliant

IP54 designed



FLAREBRIGHT

APPLIED BRILLIANCE

Founded 2015
35 brilliant people
\$10M+ revenue

Flying on
operational
platforms

ITAR-free,
UK Sovereign
Capability

Evaluated
by UK Ministry
of Defence

Contact



Oxford (HO) & London, UK
UK +44 (0) 1865 589 973
sales@flarebright.com

Head Office

Westcott Venture Park, HP18 OXB,

London Office

Imperial College, London, W12 0BZ, UK

International Offices & Sales Agents

Coming soon

→ flarebright.com



EXTERA



**Robust and
compliant
flight
termination**

**Flight tested,
& operational**

Parachute
option
available



Supports both
electric and wet
fuel termination

Wide range of fixed
wing platforms



Totally independent comms and actuation



FLAREBRIGHT

APPLIED BRILLIANCE



Flight termination system

Enhance flight safety and expedite regulatory compliance

- No more geofence breaches
- End 'loss-of-control' flights with controlled descent and minimal damage
- Totally independent comms and actuation
- Reduce risk and protect your brand
- 100% segregated components
- Scale with minimal architectural adjustments
- Independent monitoring capability functions even after termination

Containment with confidence


Rigorously tested and design assured. Includes 12 month warranty and online user manuals. Support available.

Simple integration

- Receive your FTS system
- Mount air unit and connect into UAS
- Set up ground unit
- Power on, test and fly!

Simple interfacing

- Browser-based application, runs on Microsoft laptops, no internet required
- Independent radio signal: 480 or 915 Mhz
- Data logs in .CSV format

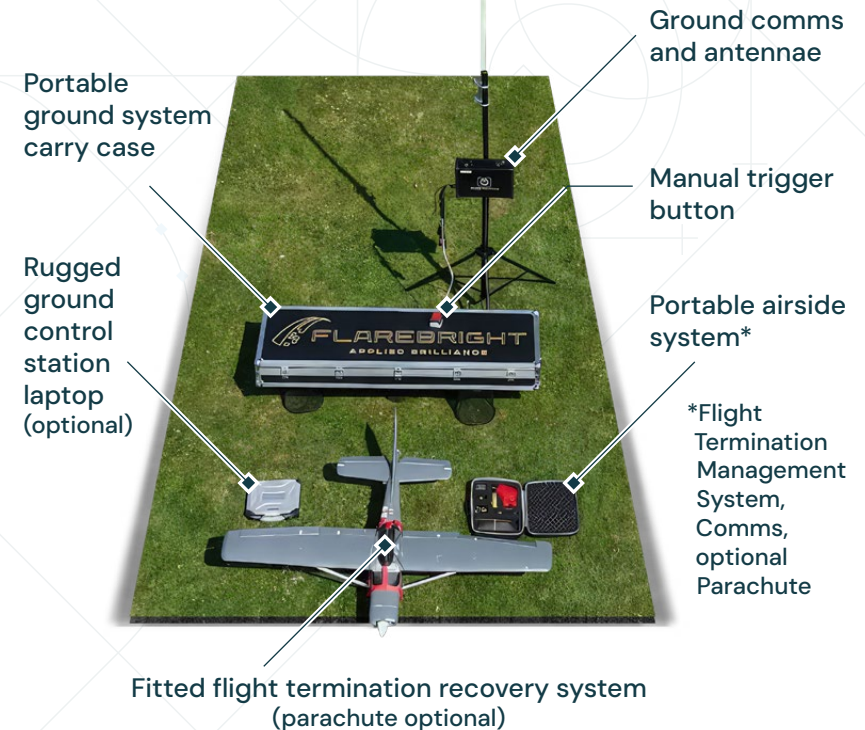

For **every** platform

